

EUROROLL - POLYMER PALLET ROLLER TRACKS


for live storage systems, transportation and conveying

Roller Tracks

The use of Roller tracks offers many advantages. Besides the easy installation and low maintenance, it can be used for various applications.

The roller track consists of an 80mm wide zinc plated, U shaped profile with a standard height of 55mm. Total height including rollers is 78mm. The rollers can be installed on 26mm increments. The maximum length of a track is 6006mm.


The rollers have a diameter of 50mm. The closest pitch is therefore 52mm. With 72mm flanged rollers the minimum pitch is 78mm.

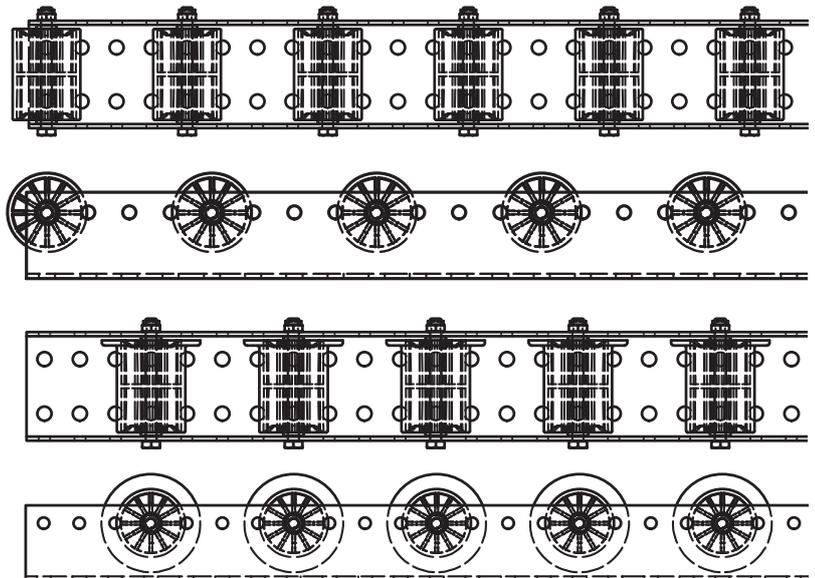

Layout


NR 100/67 KS

Roller pitch: 52, 78, 104, 130, 156 mm.
Two rows of holes in the base for fastening the track to the support structure.





SR 100/67 KS

Roller pitch: 78, 104, 130, 156 mm.
Two rows of holes in the base for fastening the track to the support structure.



NR 100/90 KS & SR 100/90 KS

One row of holes in the base for fastening the track to the support structure.
Both rollers are available in the high version with the same pitch.

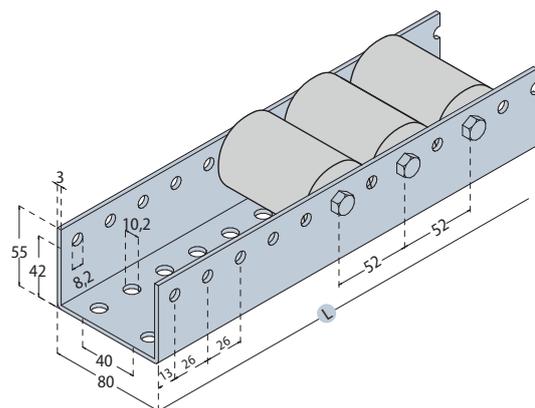

Low Profile: **U 80 - 55**
High Profile: **U 80 - 78**

EUROROLL - POLYMER PALLET ROLLER TRACKS

for live storage systems, transportation and conveying


Accessories

EE

The end stop is mounted at the end of the track and stops the pallet securely.

ESchE

The sliding end stop has a longer body for stopping pallets gently and preventing them from hitting the end stop too hard.

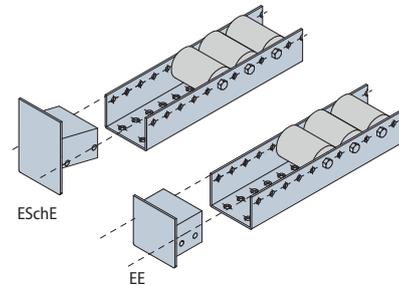


RSE

The roller guard protects the installed rollers in the profile from external damage caused by material handling equipment.

BKE

The clamp is supplied together with screws and is used to fix the track to a support construction i.e. warm formed I beams.

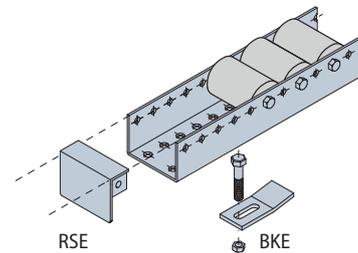

USE

The flat connector is delivered in a set of two pieces and is used to connect two tracks behind each other.

VE

The U shaped connector is used for fixing two 55mm profiles behind each other and is installed by means of the two rows of holes in the base of the track.

VEH

This is the u-connector for the 78mm high profile.

